



Title: Representing Style Information in a Markup Language Document
Inventors: Jones et al.
Docket No: M&G 60001.0298US01
Replacement Sheet

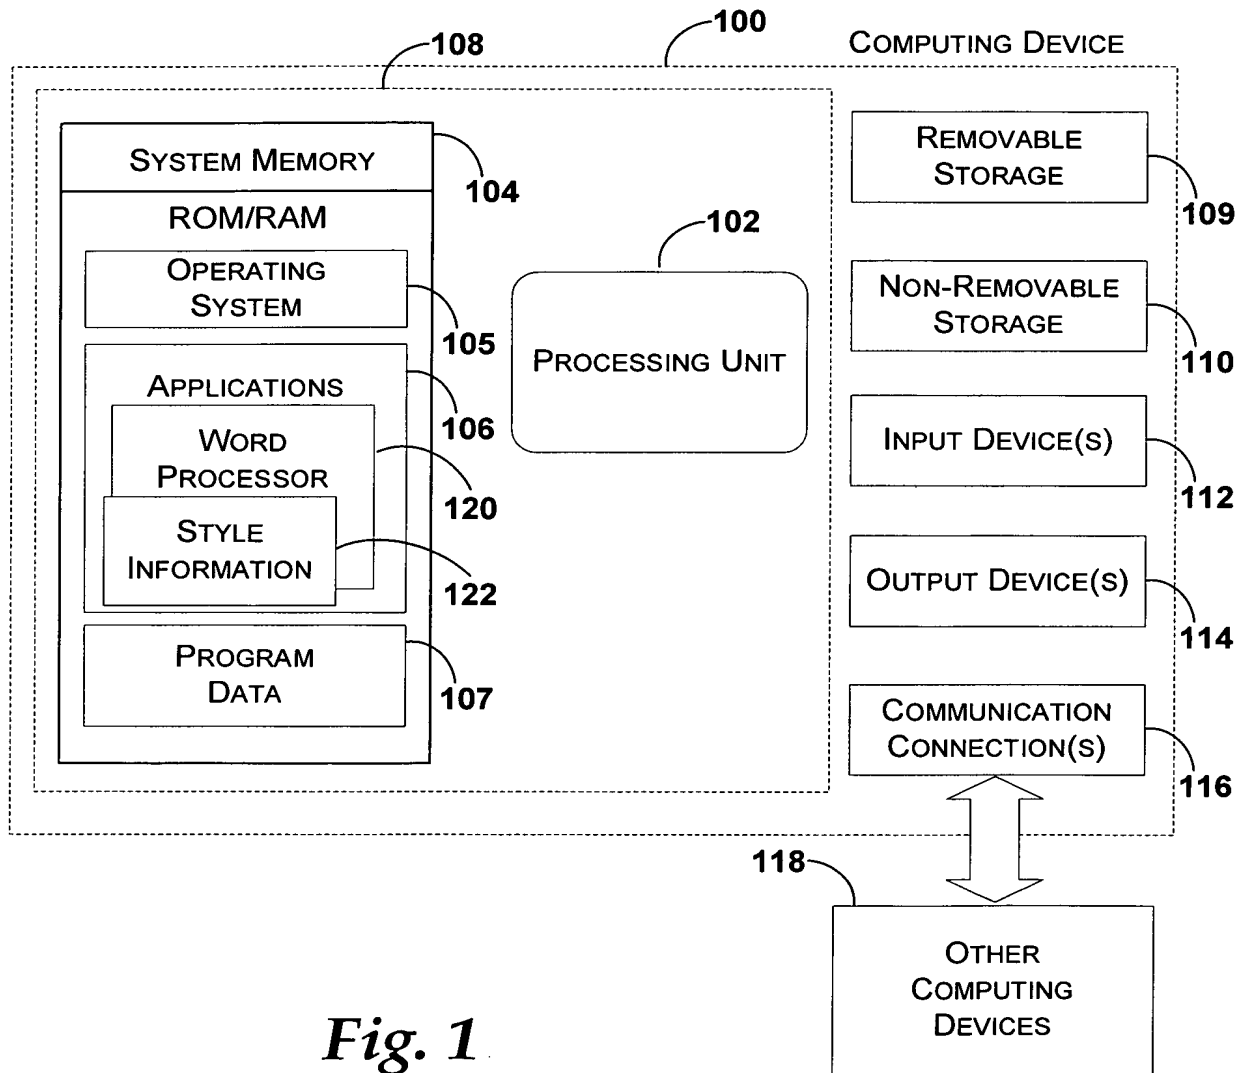


Fig. 1

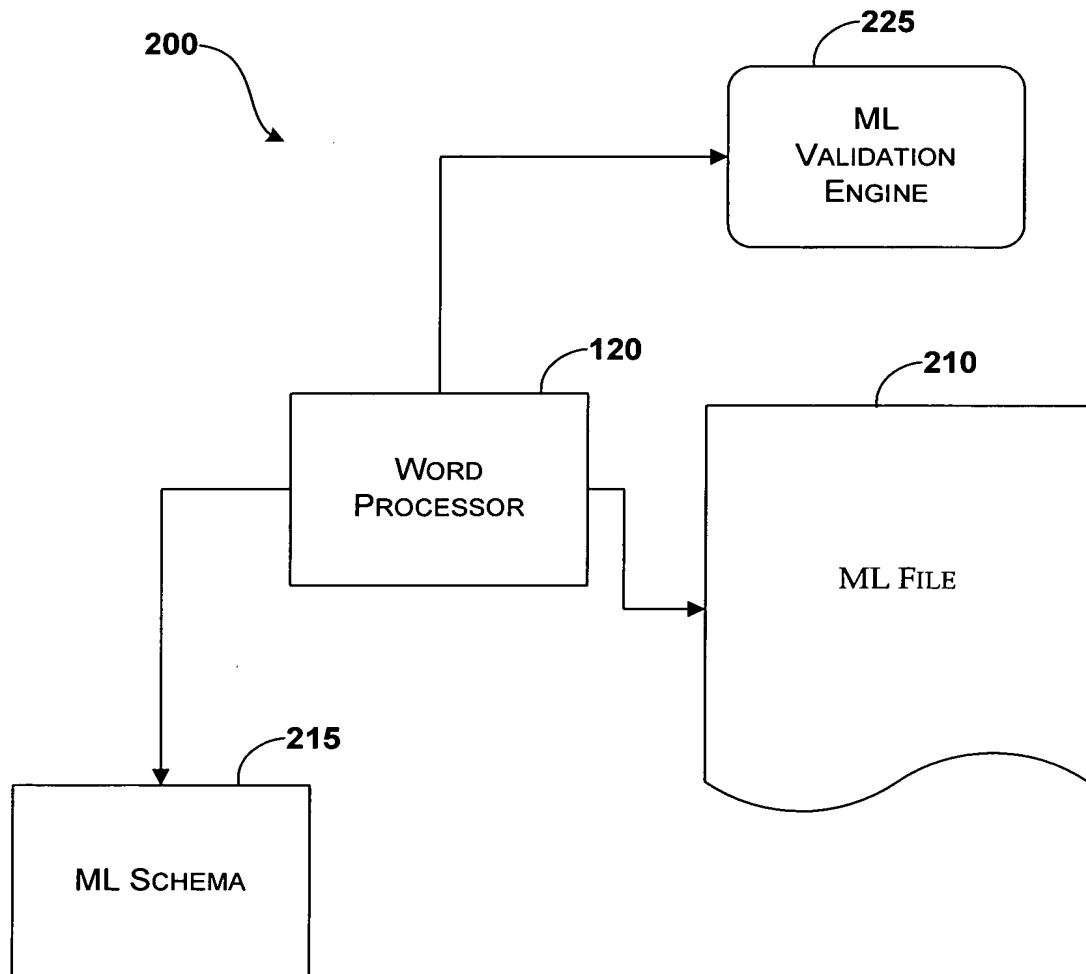


Fig. 2

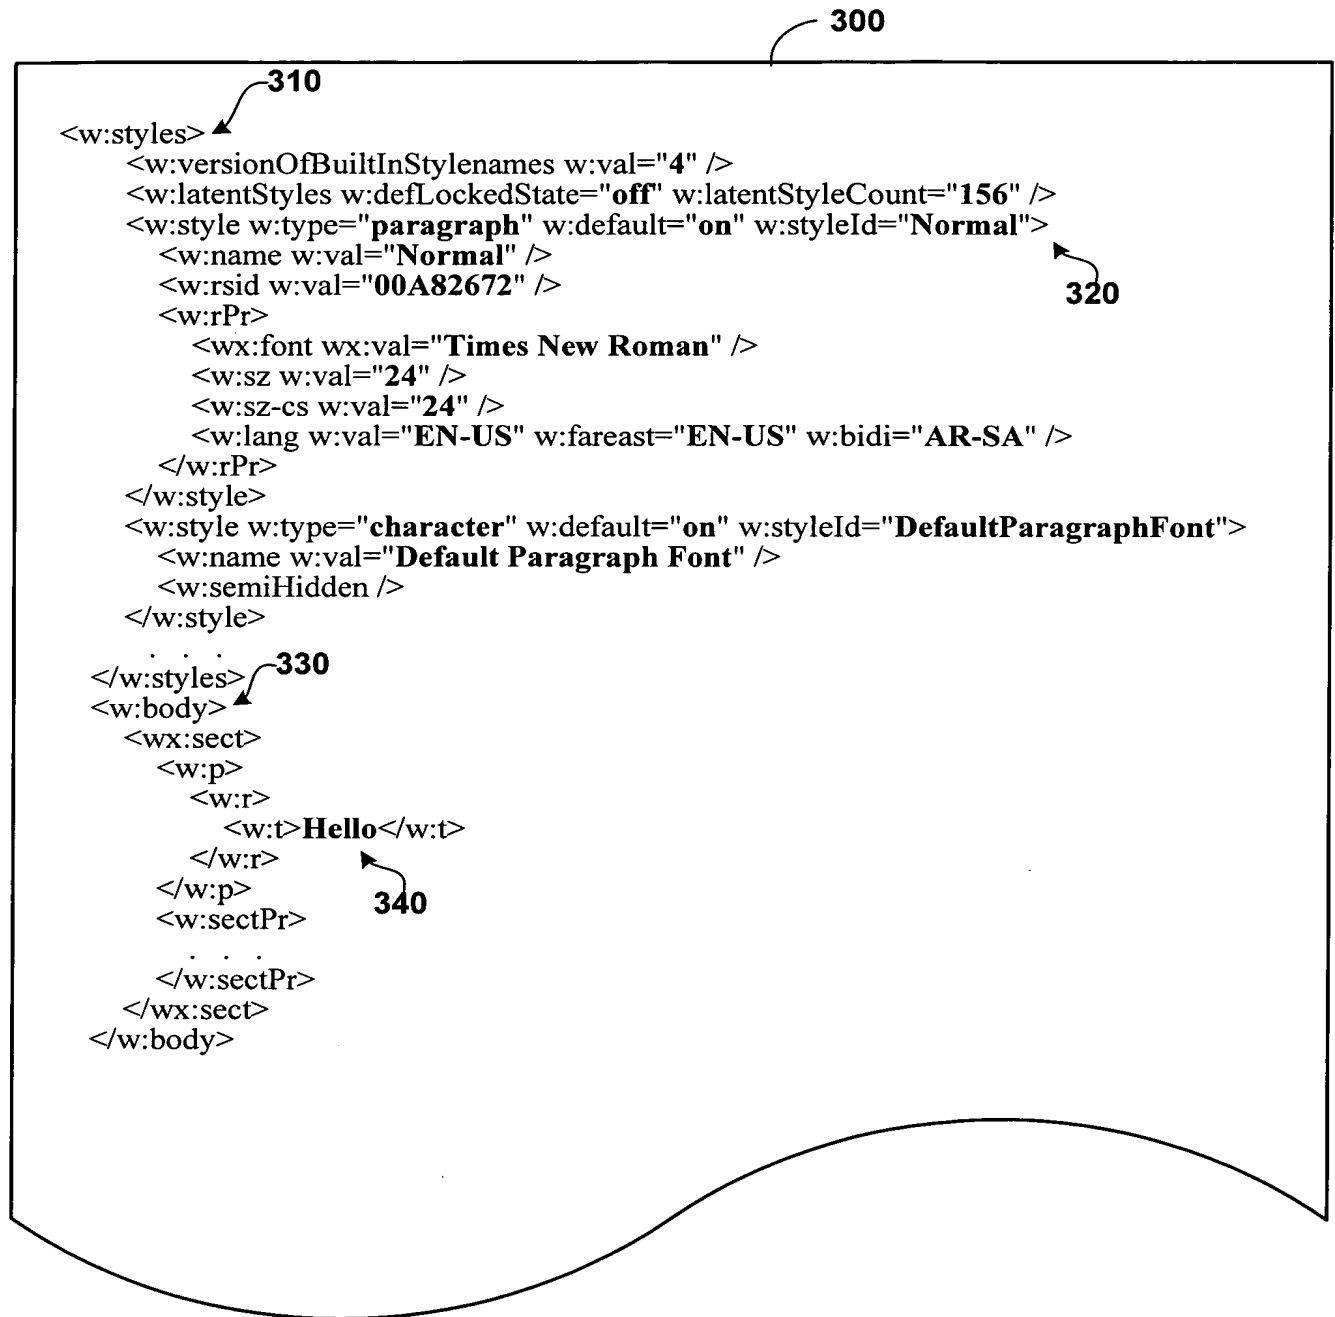


Fig. 3

Title: Representing Style Information in a Markup Language Document
Inventors: Jones et al.
Docket No: M&G 60001.0298US01
Replacement Sheet

```

<w:styles>
  <w:versionOfBuiltInStylenames w:val="4" />
  <w:latentStyles w:defLockedState="off" w:latentStyleCount="156" />
  <w:style w:type="paragraph" w:default="on" w:styleId="Normal">
    <w:name w:val="Normal" />
    <w:rsid w:val="00A82672" />
    <w:rPr>
      <wx:font wx:val="Times New Roman" />
      <w:sz w:val="24" />
      <w:sz-cs w:val="24" />
      <w:lang w:val="EN-US" w:fareast="EN-US" w:bidirectional="AR-SA" />
    </w:rPr>
  </w:style>
  <w:style w:type="character" w:default="on" w:styleId="DefaultParagraphFont">
    <w:name w:val="Default Paragraph Font" />
    <w:semiHidden />
  </w:style>
  <w:style w:type="paragraph" w:styleId="MyStyle">
    <w:name w:val="MyStyle" />
    <w:basedOn w:val="Normal" />
    <w:rsid w:val="00A82672" />
    <w:pPr>
      <w:pStyle w:val="MyStyle" />
    </w:pPr>
    <w:rPr>
      <wx:font wx:val="Times New Roman" />
      <w:color w:val="800000" />
    </w:rPr>
  </w:style>
</w:styles>
<w:body>
  <wx:sect>
    <w:p>
      <w:r>
        <w:t>Plain</w:t>
      </w:r>
    </w:p>
    <w:p>
      <w:pPr>
        <w:pStyle w:val="MyStyle" />
      </w:pPr>
      <w:r>
        <w:t>My special sentence</w:t>
      </w:r>
    </w:p>
    <w:sectPr>
      <w:pPr>
        <w:pStyle w:val="MyStyle" />
      </w:pPr>
    </w:sectPr>
  </wx:sect>
</w:body>

```

Fig. 4

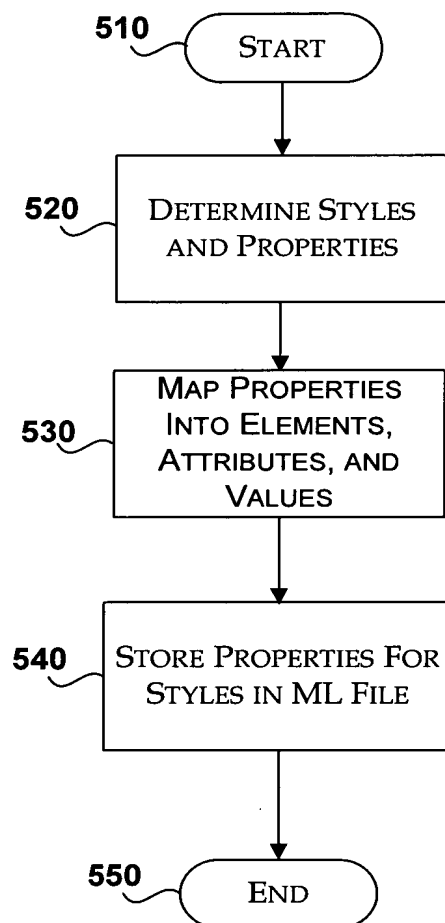


Fig. 5